
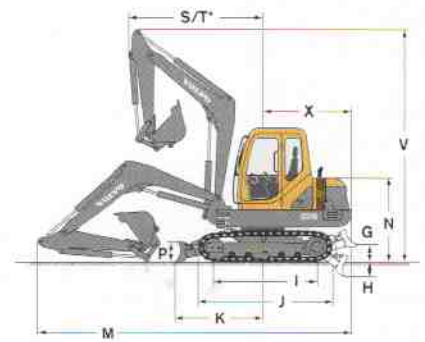
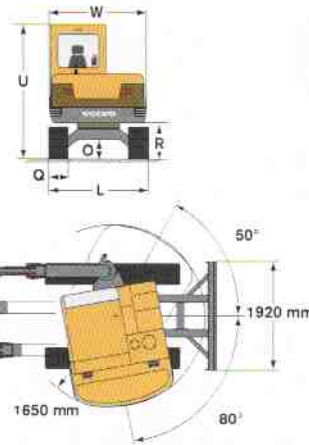


Technical characteristics

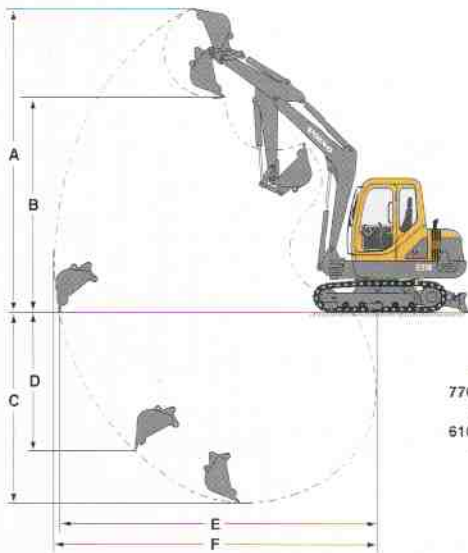

* front turning circle with max. offset

Buckets	Width	Weight	Volume
	350 mm	85 kg	70 l
	450 mm	97 kg	98 l
	600 mm	118 kg	142 l
	750 mm	138 kg	187 l
	900 mm	163 kg	231 l
	1500 mm	185 kg	265 l

Dipper	A	B	C*	C	D	E	F
1540 mm	5770	4090	4000	3820	2620	5980	6110
1900 mm	6010	4320	4360	4180	2990	6320	6450

* Dig depth with the blade down.

G	H	I	J	K	L	M	N	O
350	450	1950	2500	1610	1920	5900	1600	380

In mm

P	Q	R	S	T	U	V	W	X
360	400	690	2360	2330	2560	4470	1840	1650

These capacities are given for a machine without a bucket or quick-release coupling and fitted with rubber tracks. The handling capacity is 75% of the tipping load or 87% of the hydraulic limit.


Caution: In accordance with standard EN 474-5, the machine must be fitted with a safety valve on the boom ram and with an overload indicator for handling operations.

Horizontal Range	2.00 m	3.00 m	4.00 m	max 5.5 m
Z2		1590*	1280*	1220*
Z1	3080*	2480*	1670*	1230*
Z3	3180*	2090*	1420*	1220*
Z2		1340	850	580
Z1	2110*	1130	750	530
Z3	1910*	1140	760	680

Horizontal Range	2.50 m	3.00 m	4.00 m	max 5.8 m
Z2			1150*	1110*
Z1	2680*	2440*	1640*	1120*
Z3	3510*	2220*	1520*	1130*
Z2			860	510
Z1	1380*	1090	720	470
Z3	1650*	1010*	730	580

* hydraulic limit

in kg

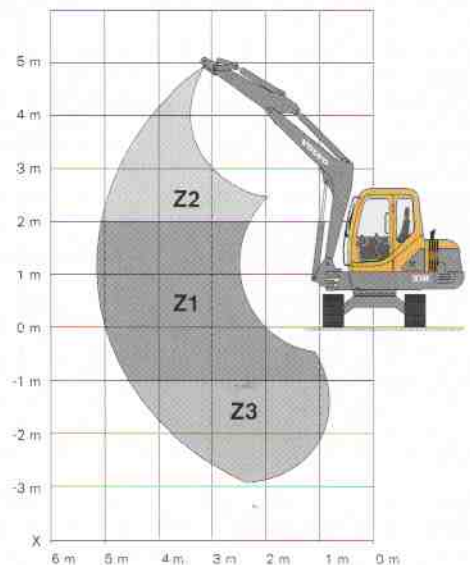

Lifting capacity with the blade resting on the ground.

Lifting capacity in total rotation over 360° with the blade raised.